PRODUCT INFORMATION PACKET



Model No: CPO16 Catalog No: CPO16

2 HP Close-Coupled Pump Motor, 3 phase, 1800 RPM, 208-230/460 V, 145JM Frame, ODP

Close-Coupled Pump Motors



FRegalRexnord

Regal and Century are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

©2021 Regal Rexnord Corporation, All Rights Reserved. MC017097E

Product Information Packet: Model No: CPO16, Catalog No:CPO16 2 HP Close-Coupled Pump Motor, 3 phase, 1800 RPM, 208-230/460 V, 145JM Frame, ODP



Nameplate Specifications


Output HP	2 Hp	Output KW	1.5 kW
Frequency	60 Hz	Voltage	208-230/460 V
Current	5.5-5/2.5 A	Speed	1730 rpm
Service Factor	1.15	Phase	3
Duty	Continuous	Insulation Class	F
Frame	145JM	Enclosure	Open Drip Proof
Thermal Protection	None	Ambient Temperature	40 °C
UL	Recognized	CSA	Υ
CE	Υ	Number of Speeds	1


Technical Specifications

Electrical Type	POLYPHASE	Starting Method	Across The Line
Poles	4	Rotation	Reversible
Mounting	Rigid Base	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	Keyed	Overall Length	14.80 in
Frame Length	6.75 in	Shaft Diameter	1.000 in
Shaft Extension	4.26 in		
Connection Drawing	A-EE7308	Outline Drawing	SS620613

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:10/12/2021

SS620613

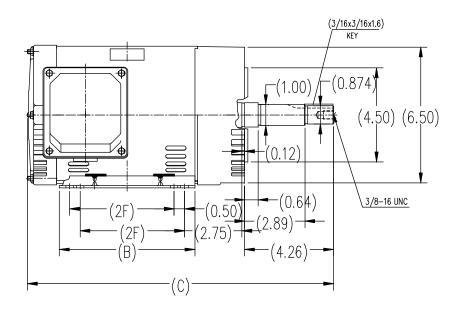

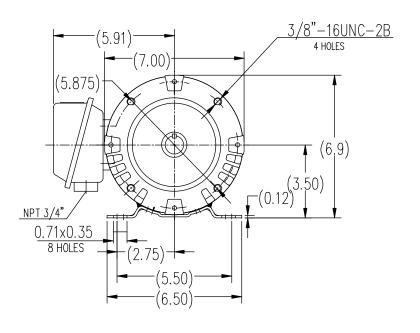

TYPE	2F	В	С
ODP 143JM	4.0	5.71	13.8
ODP 145JM	5.0	6.70	14.8

				TOI UNLES	LERANCES S SPECIFIED					DRAWN WANG 7.	26.2012
				DEC.	INCHES	REGA	REGAL REGAL-BELOIT CORPORATION OUTLINE		ION	СНК	
				.x	±.1	\			APPD		
				.xx	±.03	TITLE			SCALE		
				.xxx	±.005		ODP 143/145JM		REF		
				.xxxx	±.0005	MAT'L.			FMF		
NO.	. REVISION	BY & DATE	СНК	ANG	±1/2	FINISH		PREV			
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT		RFP		•	CAD FILE	SS620613	SIZE	DRAWING NO		REV.	
IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT — DO NOT SCALE THIS PRINT		DIST			•		7 B	SS6	520613		

