PRODUCT INFORMATION PACKET



Model No: CPO18 Catalog No: CPO18

2 HP Close-Coupled Pump Motor, 3 phase, 3600 RPM, 208-230/460 V, 145JM Frame, ODP

Close-Coupled Pump Motors





Regal and Century are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

©2021 Regal Rexnord Corporation, All Rights Reserved. MC017097E

Product Information Packet: Model No: CPO18, Catalog No:CPO18 2 HP Close-Coupled Pump Motor, 3 phase, 3600 RPM, 208-230/460 V, 145JM Frame, ODP



Nameplate Specifications


Output HP	2 Hp	Output KW	1.5 kW	
Frequency	60 Hz	Voltage	208-230/460 V	
Current	5.5-5/2.5 A	Speed	3480 rpm	
Service Factor	1.15	Phase	3	
Duty	Continuous	Insulation Class	F	
Frame	145JM	Enclosure	Open Drip Proof	
Thermal Protection	None	Ambient Temperature	40 °C	
UL	Recognized	CSA	Υ	
CE	Υ	Number of Speeds	1	


Technical Specifications

Electrical Type	POLYPHASE	Starting Method	Across The Line	
Poles	2	Rotation	Reversible	
Mounting	Rigid Base	Drive End Bearing	Ball	
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel	
Shaft Type	Keyed	Overall Length	17.90 in	
Frame Length	6.75 in	Shaft Diameter	1.000 in	
Shaft Extension	4.26 in			
Outline Drawing	SS620613	Connection Drawing	A-EE7308	

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:10/12/2021

SS620613

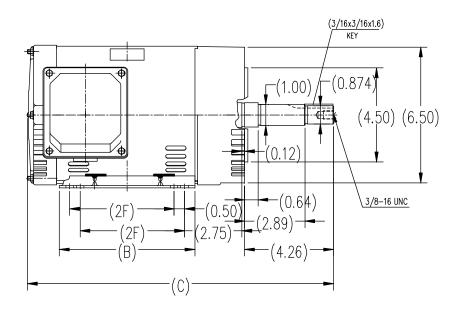

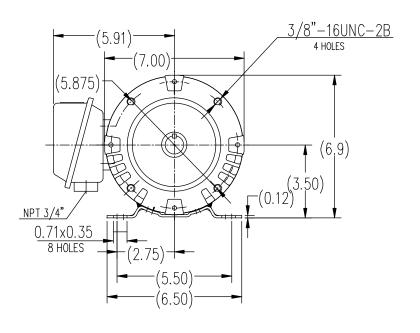

TYPE	2F	В	С
ODP 143JM	4.0	5.71	13.8
ODP 145JM	5.0	6.70	14.8

				TOI UNLES	LERANCES S SPECIFIED	\ \				DRAWN WANG 7.	26.2012
				DEC.	INCHES	REGA	REGAL-BELOIT COR	REGAL-BELOIT CORPORATION		снк	
				.x	±.1	\			APPD		
				.xx	±.03	TITLE	OUTLINE ODP 143/145JM			SCALE	
				.xxx	±.005				REF		
				.xxxx	±.0005	MAT'L.				FMF	
NO.	. REVISION	BY & DATE	СНК	ANG	±1/2	FINISH		PREV			
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT		RFP CAD FILE SS620613		SIZE			REV.				
IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT — DO NOT SCALE THIS PRINT		DIST			•		7 B	SS6	520613		

