


PRODUCT INFORMATION PACKET

Model No: E3AB3002075B30S41100

Catalog No: E3AB3002075B30S41100

Made in Italy E3AB30 Series, General Purpose Low Voltage IEC motor IE3, Flameproof, 0,55kW,
3 phase, 2808 RPM, D230/Y400V 50Hz, 71B Frame B3, 2 Poles, IC411

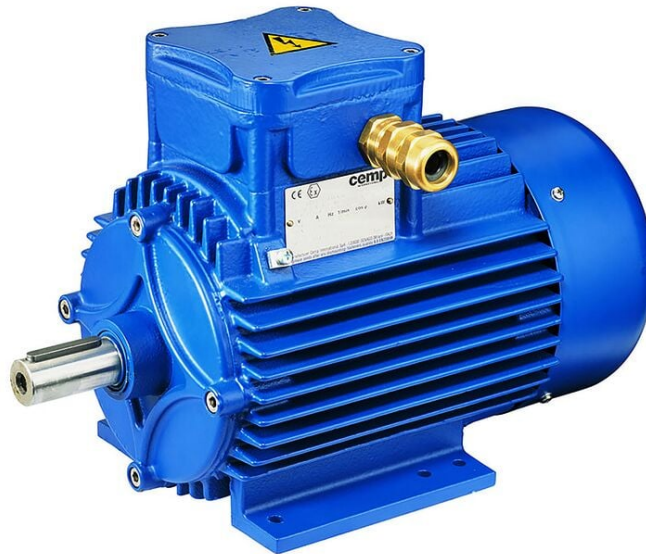

Regal and CEMP are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

©2022 Regal Rexnord Corporation, All Rights Reserved. MC017097E

Nameplate Specifications


Output HP	0.74 Hp	Output KW	0.55 kW
Frequency	50 Hz	Voltage	230/400 V
Current	1.2 A	Speed	2808 rpm
Service Factor	1	Phase	3
Efficiency	77.8 %	Power Factor	0.83
Duty	S1	Insulation Class	F
Frame	71B	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	No Protection	Ambient Temperature	40 °C
Drive End Bearing Size	6203	Opp Drive End Bearing Size	6203
UL	No	CSA	No
CE	Yes	IP Code	IP55
Number of Speeds	1		

Technical Specifications



Electrical Type	Squirrel Cage	Starting Method	Direct On Line
Poles	2	Rotation	Bi-Directional
Mounting	B3	Motor Orientation	Horizontal
Drive End Bearing	Zz	Opp Drive End Bearing	Zz
Frame Material	Cast Iron	Shaft Type	Keyed
Overall Length	311.00 mm	Frame Length	112.00 mm
Shaft Diameter	14.000 mm	Shaft Extension	30 mm
Assembly/Box Mounting	Top		
Outline Drawing	B3A048070001A01	Connection Drawing	SC-01-T-1v-1a

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:12/02/2022

DETAIL B
SCALE 1 : 1

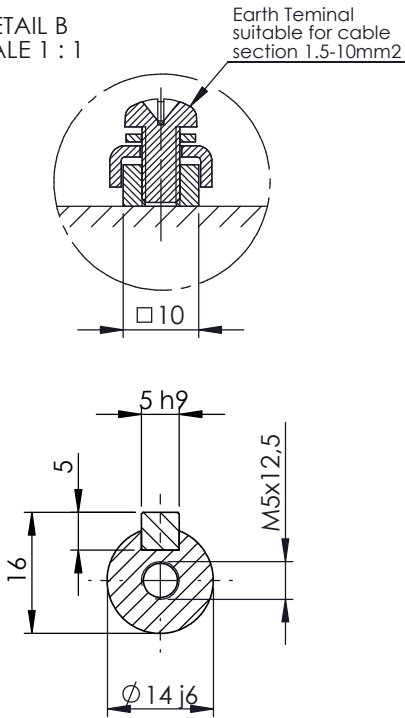

SECTION A-A
SCALE 1 : 1

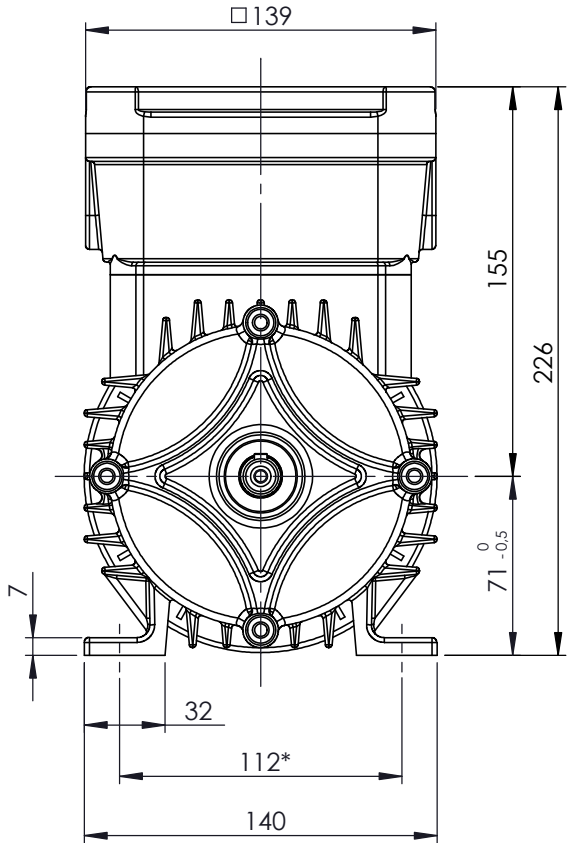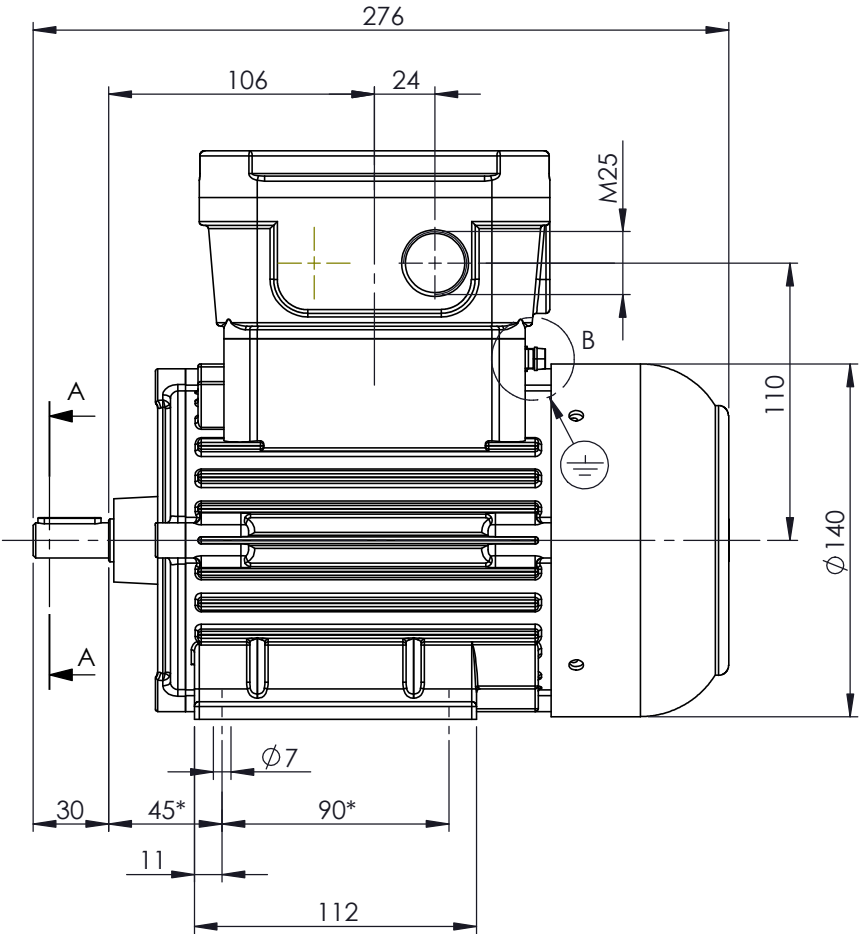

N.B.
Dimensions in mm. according to IEC 60072
Tolerances where not differently marked ± 2 mm.
* Tolerances ± 0.8

Earth terminal: 1 in the terminal box, 1 on the frame.

Customer reference and additional information:



Frame size: 71

Document N.**B3A048070001A01** - Date 28/11/2008
Issued by G.Toscano - Approved by A.Madaschi
Cemp - Senago (Italy)

Rev. Motor type and description

0

cemp
Flameproof
Motors


Schema di collegamento - *Connection diagram*
Schemas de branchement - *Schaltpl n*
Esquemas de conexi n




DTE 01/01/2004
SC - 01 - T - 1v.doc

**Motori trifase una velocit  - *Single speed, three phase motors* - Moteurs triphas  une vitesse
Drehstrommotor Eine Drehzahlstufe - Motores trif sico una velocidad**

Collegamento - *Connection* - Connexion - *Schaltung* - Conexi n

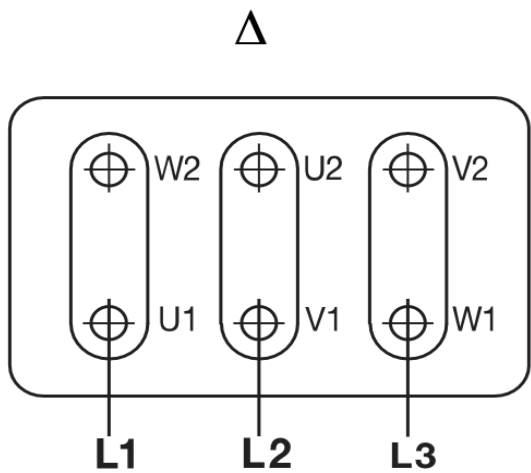

Collegamento - *Connection* - Connexion - *Schaltung* - Conexi n

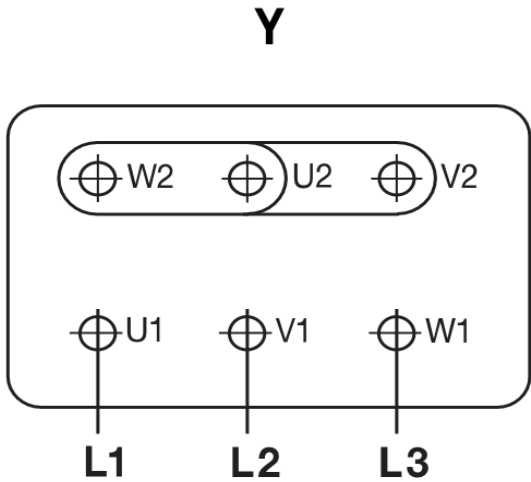

L1 - L2 - L3 = Linea - *Supply* - Reseau - *Netz* - Red

Per invertire la rotazione invertire due fasi - *To change the rotation reverse two phases* - Pour changer le sens de rotation inverser deux phases - *Zur Drehrichtungs nderung zwei Phasen vertauschen* - Para invertir el sentido de rotaci n invertir dos fases

Marcatura Morsetti Ausiliari - <i>Additional terminals marking (IEC60034-8)</i>		
Marcatura <i>Marking</i>	No. morsetti <i>terminals</i>	Morsetto ausiliare per: <i>Additional terminal for:</i>
TP1A - TP2A (allarme- <i>warning</i>)	2	Termistori PTC (alta velocità) - <i>Thermistor PTC (high speed) [*]</i>
TP1B - TP2B (allarme- <i>warning</i>)	2	Termistori PTC (bassa velocità) - <i>Thermistor PTC (low speed) [*]</i>
R1 - R2 - R3 (I sensore - <i>sensor</i>)	3	Termistore PT100 3 fili - <i>Thermistor PT 100 with 3 wires</i>
R4 - R5 - R6 (II sensore - <i>sensor</i>)	3	
R7 - R8 - R9 (III sensore - <i>sensor</i>)	3	
R11 - R12 - R13 (anteriore - <i>DE</i>)	3	Termistore PT100 su cuscinetto - <i>Thermistor PT 100 on bearing</i>
R21 - R22 - R23 (posteriore - <i>NDE</i>)	3	
TB1 - TB2 (allarme- <i>warning</i>)	2	Protettore bimetallico normalmente chiuso - <i>Normally closed bi-metallic switch (**)</i>
TB3 - TB4 (intervento- <i>switch off</i>)	2	
TB8 - TB9 (intervento- <i>switch off</i>)	2	Protettore bimetallico del freno normalmente chiuso - <i>NC brake bi-metallic switch (**)</i>
TM1 - TM2 (allarme- <i>warning</i>)	2	Protettore bimetallico normalmente aperto - <i>Normally open bi-metallic switch (**)</i>
TM3 - TM4 (intervento- <i>switch off</i>)	2	
HE1- HE2	2	Resistenze riscaldanti - <i>Space heaters</i>
U1 - U2	2	Ventilazione ausiliaria monofase - <i>Single phase forced ventilation</i>
U - V - W	2	Ventilazione ausiliaria trifase - <i>Three phase forced ventilation</i>
colori secondo schema del produttore - <i>colours according manufacturer</i>	9	Encoder
CA1 - CA2	2	Condensatore - <i>Capacitor</i>
PE	1	Conduttore di terra - <i>Earth cable</i>

[*] U nominale - *U rated* = 6V - max 30V(**) U nominale - *U rated* = 250V

FOGLIO DATI PER MOTORI ELETTRICI ASINCRONI TRIFASI : SERIE IEC
DATA SHEET FOR ASYNCHRONOUS THREEPHASE INDUCTION MOTORS: IEC SERIES

Cliente / Customer	CEMP
Offerta / Offer : 2021.	
Impianto / Plant	-

DATI DI PROGETTO - DESIGN DATA

Modo di protezione	II2G	Motore / Frame
Type of protection		Scatola morsetti / Terminal box
Tem. Amb. Min. / Min Amb.Temp.	-20	°C
Umidità relativa / Relative humidity	90%	
Tensione nominale / Rated Voltage	400 V +/- 5%	

Ex db IIB T4 Gb	IP55
Ex db IIB Gb	IP55
Tem. Amb. Max. / Max Amb. Temp.	40 °C
Altitudine / Altitude	< 1000 mslm / masl
Frequenza / Frequency	50 Hz +/- 2%

DATI FUNZIONALI E COSTRUTTIVI - PERFORMANCE AND CONSTRUCTION DATA

1	Quantità / Quantity				01	
2	Motore tipo / Motor type				AB30r 71B 2	
3	Numero di serie / Serial Number					
4	Forma costruttiva / Shape				B3	
5	Certificato / Certificate			TUV IT	14ATEX065X	
6	Altro certificato / Other certificate					
Dati nominali / Rated data						
7	Poli / Pole			n°	2	
8	Potenza nominale / Rated power			kW	0,55	
9	Corrente nominale / Rated current			A	1,22	
10	Velocità nominale / Full Load speed			1/min	2808	
11	Collegamento / Winding connection				Y	
12	Isolamento / Insulation class				F	
13	Sovratemperatura / Temperature rise				80K	
14	Raffreddamento / Cooling type				IC411	
15	Fattore di servizio / Service factor				1	
16						
17	Classe di rendimento / Efficiency level			IEC 34-30	IE3	
Performances elettriche / Electrical performances						
Carico / Load			4/4	3/4	2/4	
18	Giri / Speed	1/min	2808	2864	2913	
19	Corr. / Curr.	A	1,22	0,97	0,75	
20	Rend / Eff	%	77,8	79,0	78,2	
21	cos φ	-	0,83	0,77	0,67	
Performances all'avviamento / Starting performances						
22	Ia/In - LRC/FLC			%	530	
23	Cosphi a rotore bloccato / LR power factor				0,78	
	Tempo a rotore bloccato / LRWT					
24	100% Un (A caldo / Warm)			sec	10	
25	(A freddo / Cold)			sec	22	
26	80% Un (A caldo / Warm)			sec	15	
27	(A freddo / Cold)			sec	35	
	Tempo di avviamento ammissibile / ART					
28	100% Un			sec	19	
29	80% Un			sec	30	
Curva di coppia / Speed-torque values						
30	Coppia nominale / Rated Torque			Nm	1,87	
31	Ca/Cn - LRT/FLT			%	310	
32	Cmax/Cn - BDT/FLT			%	350	
33						
34						
35						
Varie / Other						
36						
37						
38						
39						

Servizio / Duty		
40	Servizio / Duty type	- S1
41	Intermittenza / Cyclic duration factor	-
42	Avviamenti-ora / Starting-hour	-
43	Tempo ciclo / Time	-
Cuscinetti / Bearings		
44	Cuscinetto ant / DE bearing	- 6203 ZZ
45	Cuscinetto post / NDE bearing	- 6203 ZZ
46	Carico radiale max / Max radial load in X1	N 450
47	Carico assiale max / Max axial load	N 140
48	Tipo grasso / Grease type	LGHP2 SKF or equivalent
49	Intervallo lubrificazione / Lubrication	h -
50	Quantità grasso / Quantity grease	gr -
Caratteristiche meccaniche / mechanical specification		
51	Massa / Mass	kg 19
52	Momento d'inerzia / Moment of inertia	kgm2 0,0004
53	Rumore a vuoto / Noise at no load (1 m)	Lp dB(A) 76
54	Vibrazioni / Vibration level	IEC 34-14 A
55	Limite norma / Vibration limit	mm/sec 1,60
56		
57		
Dati entrata cavi - verniciatura / Cable entry and painting		
63	Entrata cavi / Cable entry	IEC 60423 1xM25
64	Ciclo verniciatura / Painting cycle	STD
65	Colore finale / Final colour	RAL 5010
66		
67		
68		
69		
70		
71		
Ausiliari - Auxiliaries		
72	Sonde termiche / Temperature detector	winding -
73	Sonde termiche / Temperature detector	bearing -
74	Scaldiglie / Heaters	V / W -
75	Preparation for SPM sensor	-
76	Pressacavi / Cable glands	NO
77		

Documento preliminare - Preliminary data sheet

Prepared by : AP

Tolleranze secondo - Tolerances according IEC 60034-1

Rev. 0

Data / Date 28 January 2022

CURVA COPPIA/CORRENTE-GIRI TORQUE/CURRENT-SPEED DIAGRAM

Cliente / Customer CEMP


 Impianto / Plant -
 ITEM -

Numero d'offerta / Offer Number 2021.

Motore / Motor
AB30r 71B 2

Potenza nominale / Rated power	0,55	kW
Poli / Pole	2	
Tensione - Frequenza / Voltage - Frequency	400 - 50	V - Hz
Corrente / Rated current	1,22	A
Velocità / Speed	2808	rpm
Coppia / Torque	1,87	Nm

— COPPIA - TORQUE — CORRENTE - CURRENT

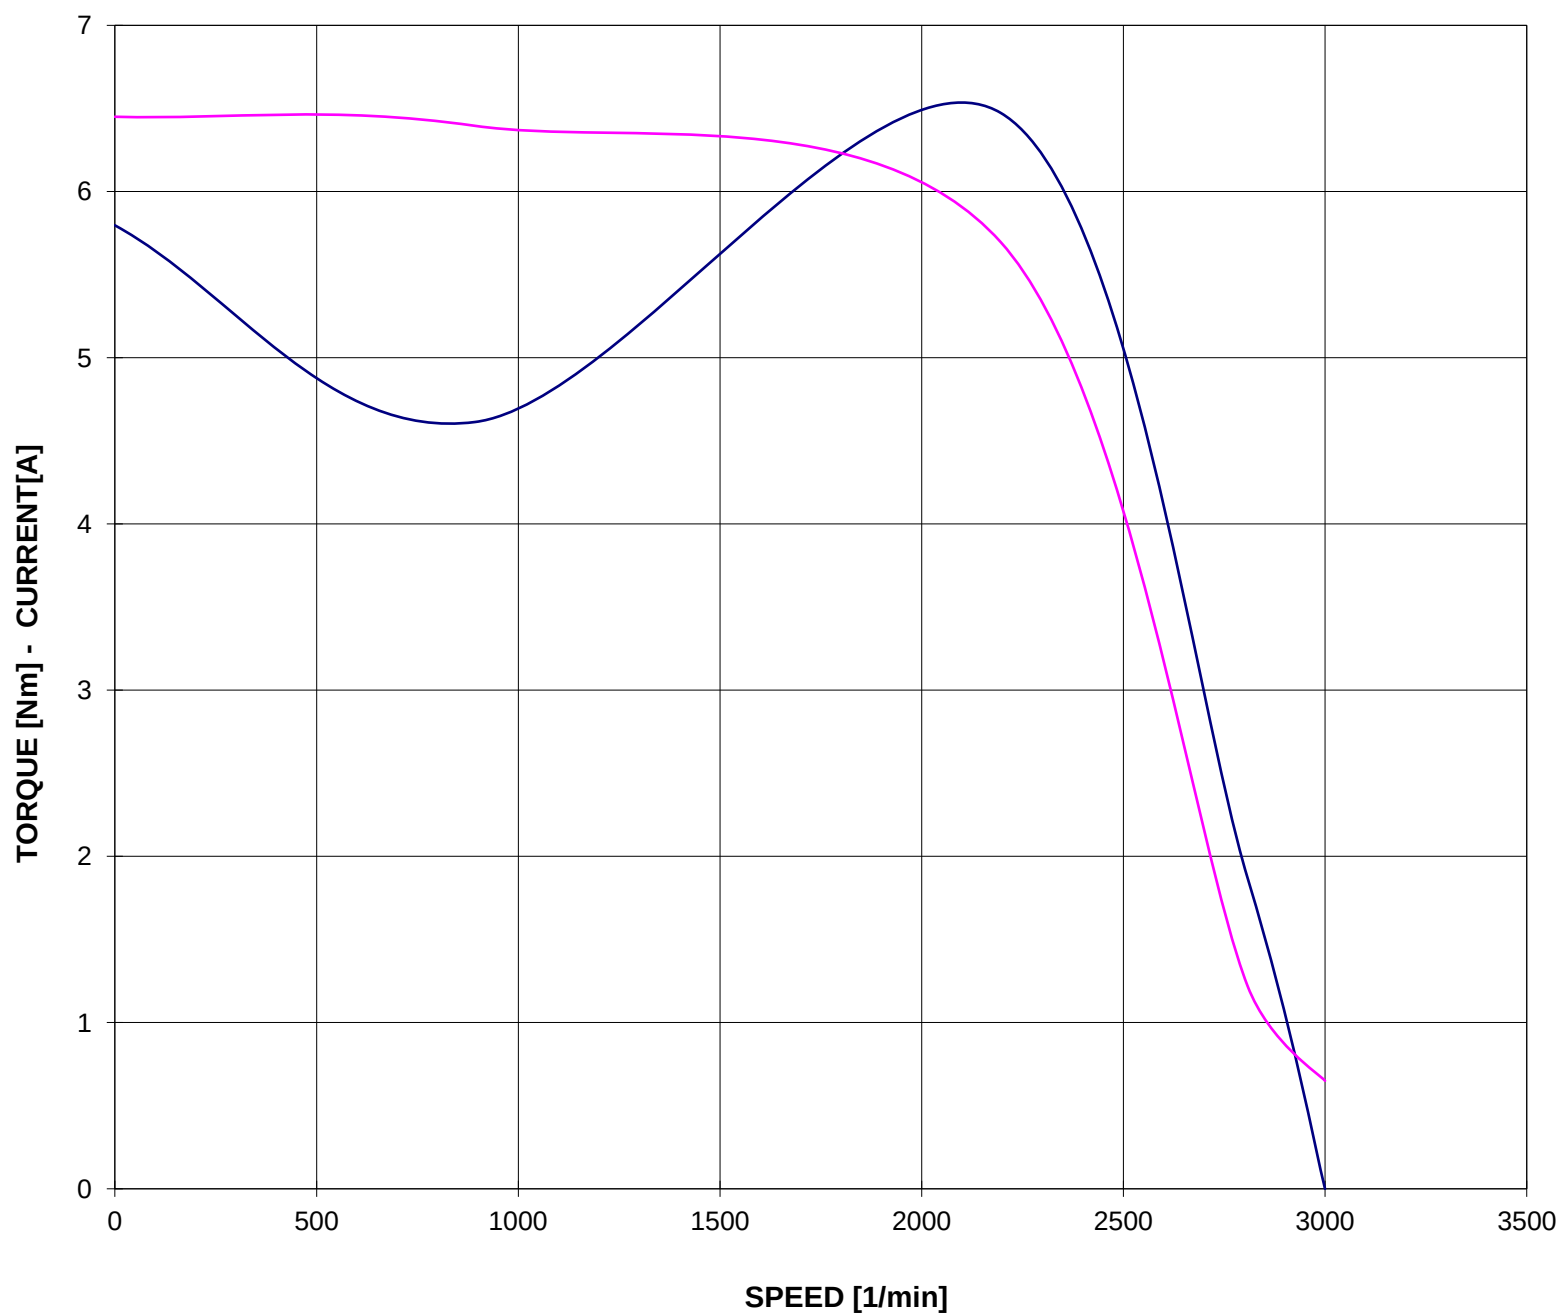

 Valori calcolati - Data obtained by calculation method
 Documento preliminare - Preliminary document

Data / Date 28-gen-22

CURVA COPPIA/CORRENTE-GIRI (Tensione ridotta)
TORQUE/CURRENT-SPEED DIAGRAM (Reduced voltage)

Cliente / Customer CEMP
Impianto / Plant -
ITEM -
Numero d'offerta / Offer Number 2021.

Motore / Motor AB30r 71B 2
Potenza nominale / Rated power 0,55 kW
Poli / Pole 2
Tensione - Frequenza / Voltage - Frequency 400 - 50 V - Hz
Corrente / Rated current 1,22 A
Velocità / Speed 2808 rpm
Coppia / Torque 1,87 Nm

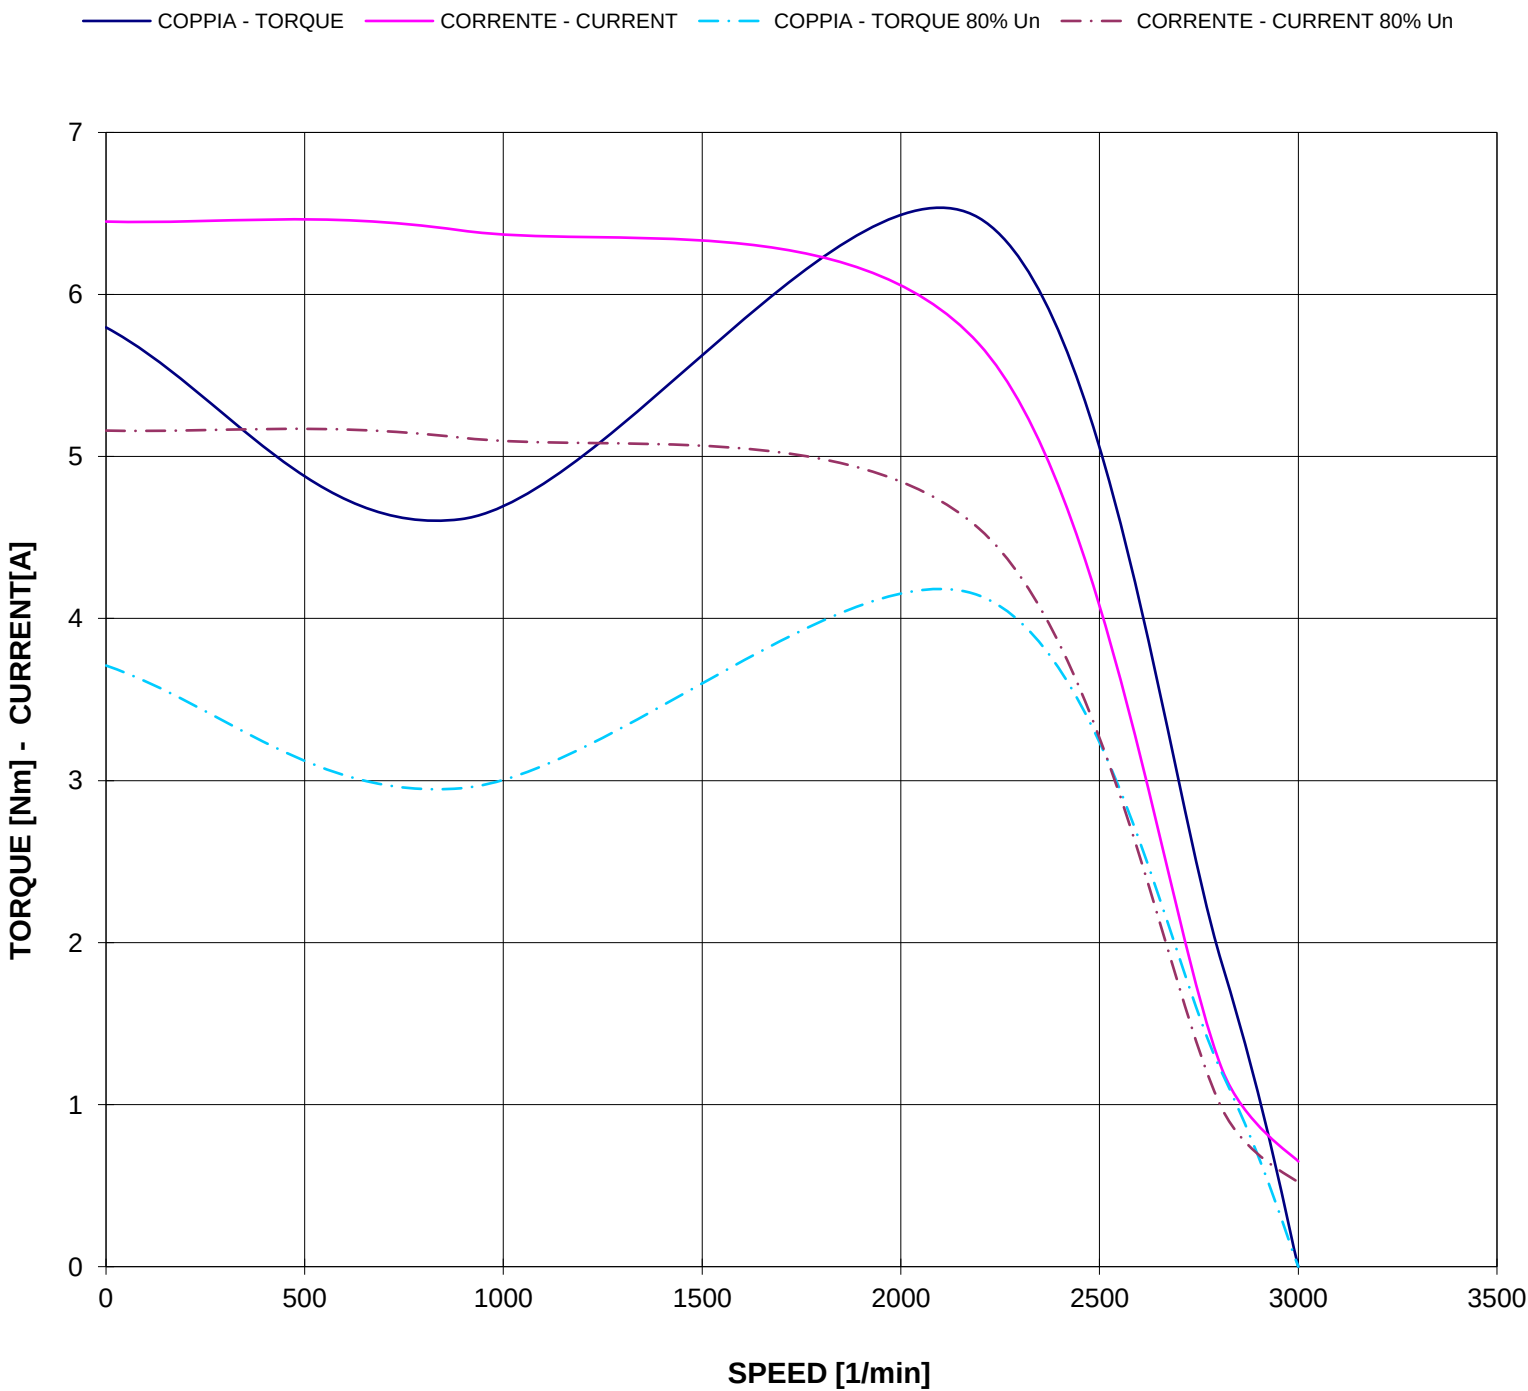

Valori calcolati - Data obtained by calculation method
Documento preliminare - Preliminary document

Data / Date 28-gen-22

CURVE CARATTERISTICHE PERFORMANCE CURVES

Cliente / Customer CEMP


Impianto / Plant
ITEM -

Numero d'offerta / Offer Number 2021.

Motore / Motor

AB30r 71B 2

Potenza nominale / Rated power	0,55	kW
Poli / Pole	2	
Tensione - Frequenza / Voltage - Frequency	400 - 50	V - Hz
Corrente / Rated current	1,22	A
Velocità / Speed	2808	rpm
Coppia / Torque	1,87	Nm

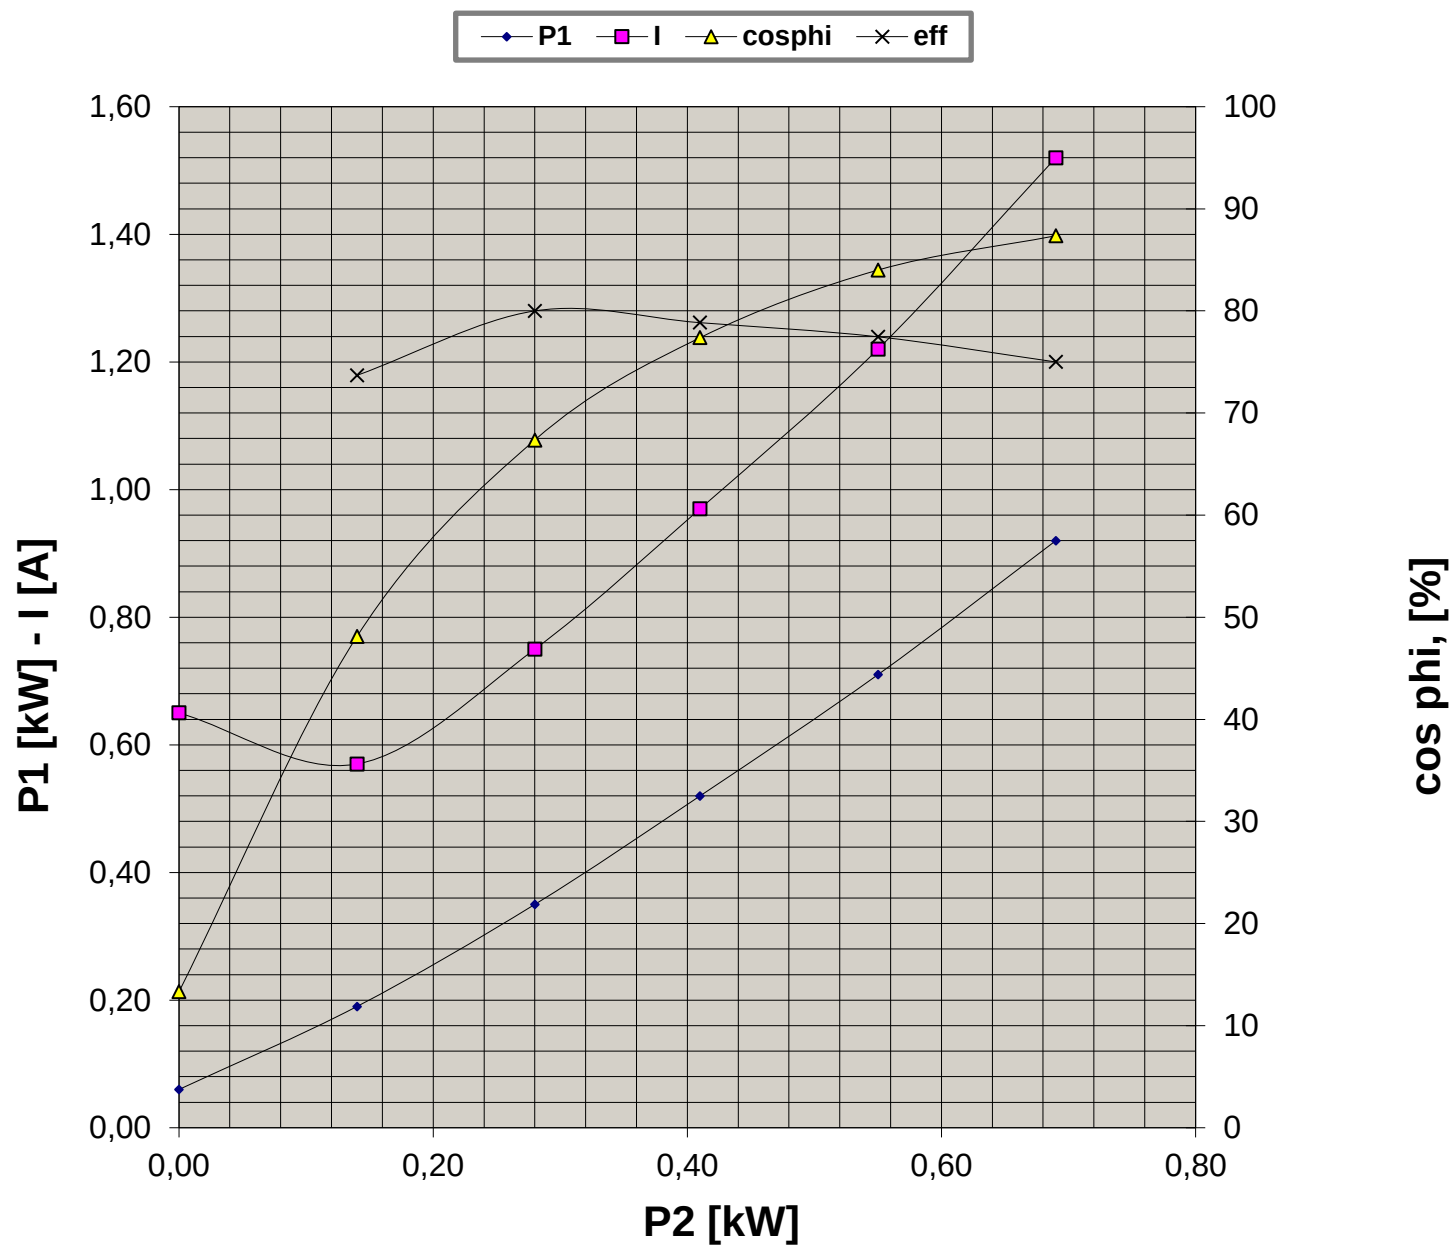

Valori calcolati - Data obtained by calculation method
Documento preliminare - Preliminary document

Data / Date 28-gen-22

CURVA LIMITE CORRENTE TEMPO THERMAL WITHSTAND CURVE


Cliente / Customer CEMP

 Impianto / Plant -
 ITEM -

Numero d'offerta / Offer Number 2021.

Motore / Motor
AB30r 71B 2

Potenza nominale / Rated power	0,55	kW
Poli / Pole	2	
Tensione - Frequenza / Voltage - Frequency	400 - 50	V - Hz
Corrente / Rated current	1,22	A
Velocità / Speed	2808	rpm
Coppia / Torque	1,87	Nm

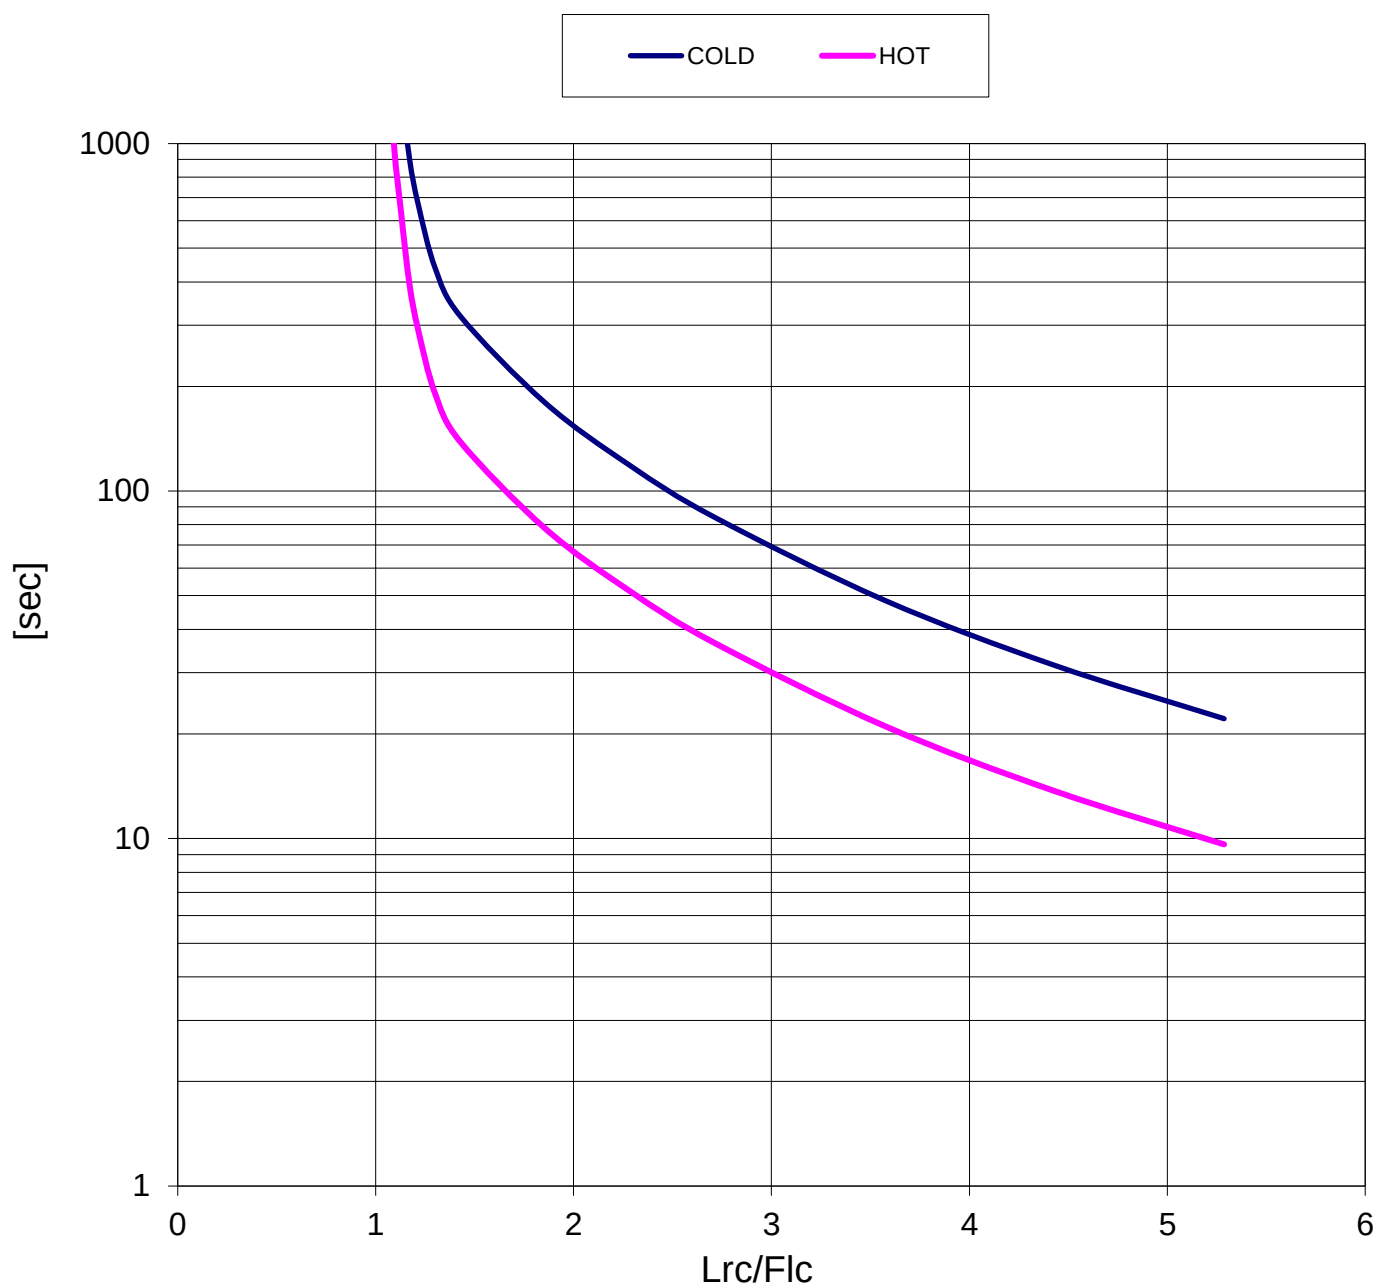
 Valori calcolati - Data obtained by calculation method
 Documento preliminare - Preliminary document

Data / Date 28-gen-22

CURVA LIMITE CORRENTE TEMPO (Tensione ridotta)
THERMAL WITHSTAND CURVE (Reduced voltage)


Cliente / Customer CEMP

Impianto / Plant -
ITEM -

Numero d'offerta / Offer Number 2021.

Motore / Motor	AB30r 71B 2	
Potenza nominale / Rated power	0,55	kW
Poli / Pole	2	
Tensione - Frequenza / Voltage - Frequency	400 - 50	V - Hz
Corrente / Rated current	1,22	A
Velocità / Speed	2808	rpm
Coppia / Torque	1,87	Nm

— COLD (100% Un) — HOT (100% Un) - - COLD (80% Un) - - HOT (80% Un)

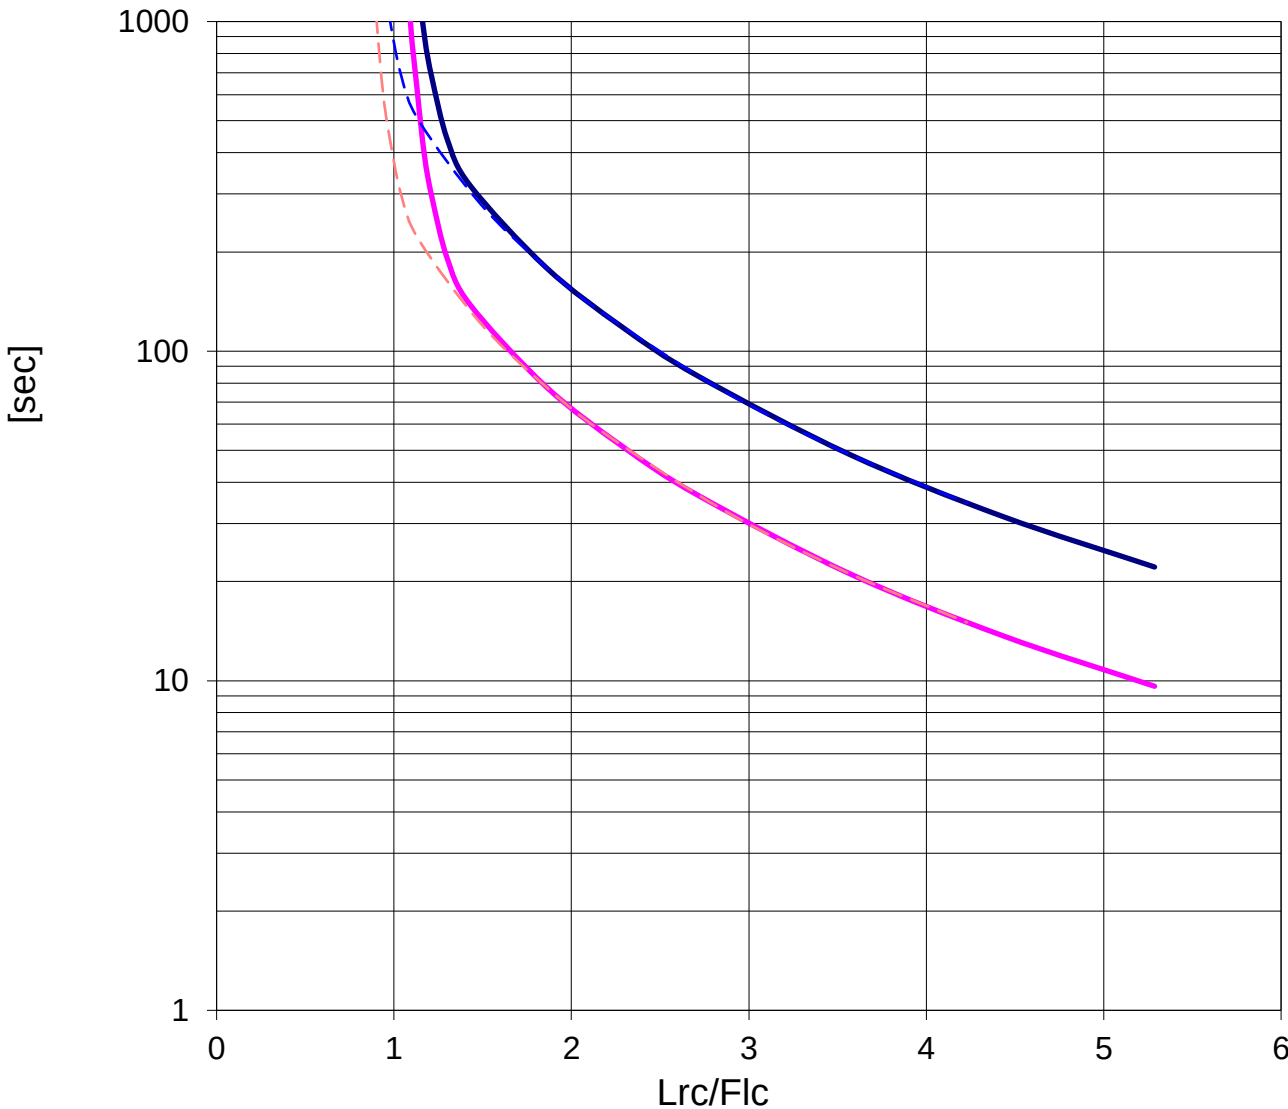

Valori calcolati - Data obtained by calculation method
Documento preliminare - Preliminary document

Data / Date 28-gen-22