PRODUCT INFORMATION PACKET

Model No: K214M2 Catalog No: K214M2

General Purpose Farm Duty Motor, 3 HP, 1 Ph, 60 Hz, 230 V, 1800 RPM, 184T Frame, TEFC



Regal and are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

©2022 Regal Rexnord Corporation, All Rights Reserved. MC017097E



Product Information Packet: Model No: K214M2, Catalog No:K214M2 General Purpose Farm Duty Motor, 3 HP, 1 Ph, 60 Hz, 230 V, 1800 RPM, 184T Frame, TEFC


Nameplate Specifications

Output HP	3 Hp	Output KW	2.2 kW			
Frequency	60 Hz	Voltage	230 V			
Current	19 A	Speed	1740 rpm			
Service Factor	1.15	Phase	1			
Duty	Continuous	Insulation Class	F			
Frame	184T	Enclosure	Totally Enclosed Fan Cooled			
Thermal Protection	Manual	Ambient Temperature	40 °C			
UL	Recognized	CSA	Υ			
CE	Υ	Number of Speeds	1			


Technical Specifications

Electrical Type	Capacitor Start Induction Run	Starting Method	Across The Line	
Poles	4	Rotation	Counterclockwise	
Mounting	Rigid Base	Drive End Bearing	Ball	
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel	
Shaft Type	Keyed	Overall Length	16.46 in	
Frame Length	11.00 in	Shaft Diameter	1.125 in	
Shaft Extension	2.81 in			
Connection Drawing	005110.01CY	Outline Drawing	035750CY	

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:09/08/2022

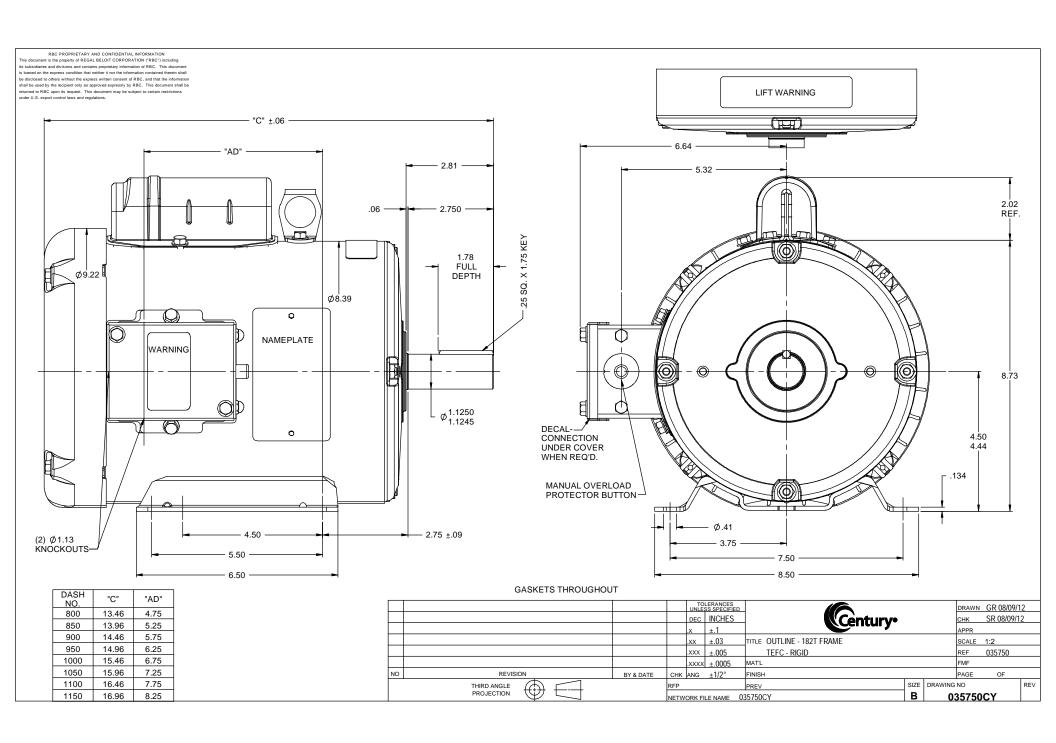

VIEW FROM OUTSIDE OF MOTOR AT SWITCH END.

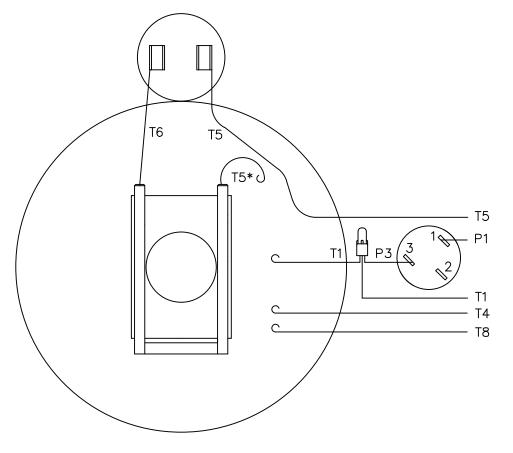

LINE LEADS Р3 T1 T1 T4 T8 ROTATION

L2

T4,T5

T4,T8

* THIS LEAD MAY BE WHITE

				TOL UNLES	ERANCES S SPECIFIED					DRAWN	GR 08/09	9/12
				DEC.	INCHES	Ucentury		7 👁	СНК	SR 08/09/	/12	
				.x	±.1					APPD		
				.xx	±.01	TITLE	EXTERNAL WIRING DIAGRA			SCALE	1=1	
				.xxx	±.005		TYPE "C" W/ PROTECTOR			REF	005110-0)1
				.xxxx	±.0005	MAT'L.	DECAL - 004015			FMF		
NO.	. REVISION	BY & DATE	CHK	ANG	±1/2°	FINISH						
		RFP			CAD FILE	00511001CY	SIZE	DRAWING NO		,	REV.	
IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT — DO NOT SCALE THIS PRINT		DIST	NLV		•] A	0051	10 - C	11CY		

FACING

LEAD END

C.C.W.

C.W.

L1

P1

P1

JOIN &

INSULATE

T1,T8

T1,T5