## PRODUCT INFORMATION PACKET



Model No: G140467.00 Catalog No: G140467.00

DBSOLETE REPLACED BY 141266.00 - ..7 1/2HP..1760RPM.213TC.TEFC.230/460V.3PH.60HZ.CONT.40C.1.15SF.C

FACE.C213T17WC3A.....






## Nameplate Specifications

Phase	3	Output HP	7.50 & 5 Hp
Output KW	5.6 & 3.7 kW	Voltage	230/460 & 190/380 V
Speed	1760 & 1450 rpm	Service Factor	1.15 & 1.15
Frame	213TC	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	No Protection	Efficiency	89.5 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	22/11 & 18/9 A	Power Factor	72
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	Н
Drive End Bearing Size	6209	Opp Drive End Bearing Size	6206
UL	Recognized	CSA	Υ
CE	Υ	IP Code	43
Number of Speeds	1		

## **Technical Specifications**

Electrical Type	Squirrel Cage Induction Run	Starting Method	Across The Line
Poles	4	Rotation	Reversible
Resistance Main	1.228 Ohms	Mounting	Round
Drive End Bearing	Ball	Opp Drive End Bearing	Ball
Frame Material	Rolled Steel	Shaft Type	Т
Assembly/Box Mounting	VERIFY		
Outline Drawing	037607-1050	Connection Drawing	005010.01

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/22/2023

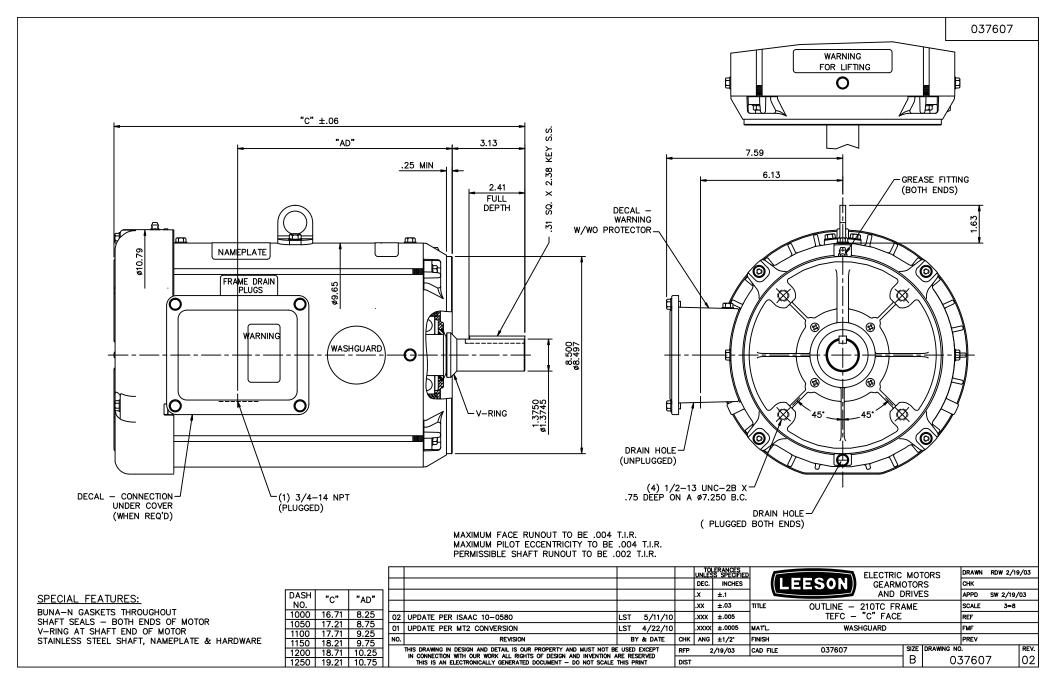

9/6/2011 11:09:19 AM

## Uncontrolled Copy

