PRODUCT INFORMATION PACKET

Model No: 182TTDB6001 Catalog No: GT0012 Globetrotter® General Purpose Motor, 5 & 3 HP, 3 Ph, 60 & 50 Hz, 230/460 & 190/380 V, 3600 & 3000 RPM, 182T Frame, DP



Regal and Marathon are trademarks of Regal Rexnord Corporation or one of its affiliated companies. ©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E







Product Information Packet: Model No: 182TTDB6001, Catalog No:GT0012 Globetrotter® General Purpose Motor, 5 & 3 HP, 3 Ph, 60 & 50 Hz, 230/460 & 190/380 V, 3600 & 3000 RPM, 182T Frame, DP

marathon®


Nameplate Specifications

Phase	3	Output HP	5 & 3 Hp
Output KW	3.7 & 2.2 kW	Voltage	230/460 & 190/380 V
Speed	3495 & 2915 rpm	Service Factor	1.15 & 1.15
Frame	182T	Enclosure	Drip Proof
Thermal Protection	No Protection	Efficiency	86.5 & 85.5 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	11.8/5.9 & 9/4.5 A	Power Factor	90
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	Н
Drive End Bearing Size	6206	Opp Drive End Bearing Size	6203
UL	Recognized	CSA	Y
CE	Y	IP Code	22
Number of Speeds	1		

Technical Specifications

Electrical Type	Squirrel Cage Induction Run	Starting Method	Across The Line
Poles	2	Rotation	Reversible
Resistance Main	3.05 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	т	Overall Length	13.72 in
Shaft Diameter	1.125 in	Shaft Extension	2.75 in
Assembly/Box Mounting	F1 ONLY		
Outline Drawing	SS620292-182T	Connection Drawing	A-EE7308

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/21/2023

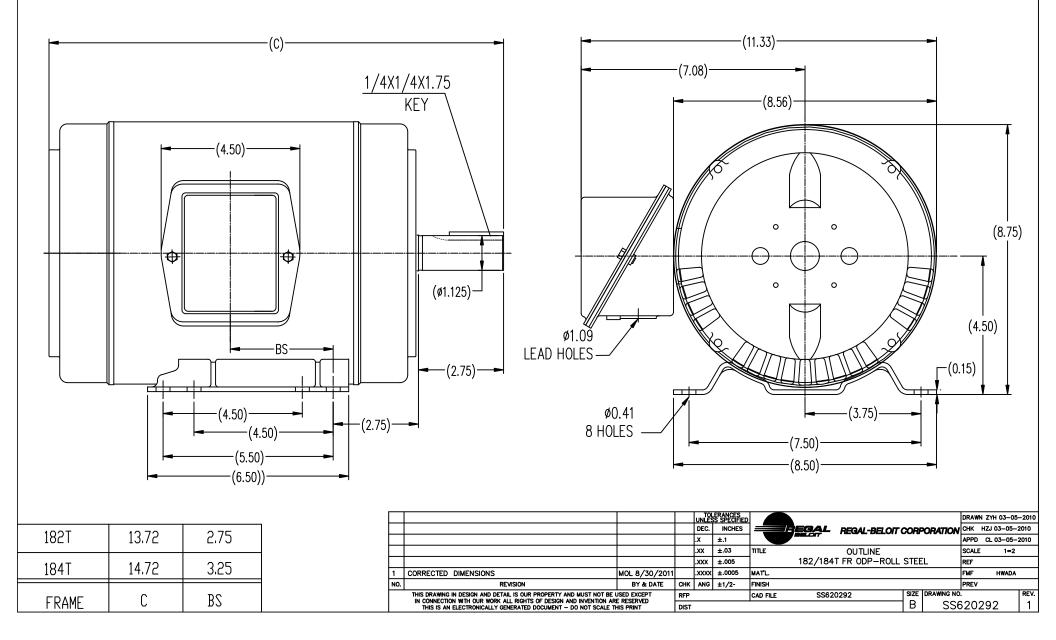

Uncontrolled Copy



CERTIFICATION DATA SHEET

Model#:	182TTDB6001 BB	WINDING#:	CHT18220006 NONE 2
CONN. DIAGRAM:	A-EE7308	ASSEMBLY:	F1/F2 CAPABLE
OUTLINE:	B-SS620292		

TYPICAL MOTOR PERFORMANCE DATA

НР	ĸw	SY	NC. RPM	F.L. RPM	FRAME	ENCLOS	URE	KVA CODE	DESIGN
5&3	3.70&2	2.24	3600	3495&2922	182T	DP		Н	В
РН	Hz	VOLTS	FL AMPS	START TYPE	DUTY	INSL	S.F	AMB°C	ELEVATION
3	60/50	230/460#190/	11.8/5.9&9/4.5	ACROSS THE	CONTINUOU	F7	1.15/1	.15 40	3300
		380		LINE	S				

FULL LOAD EFF: 86.5&85.5	3/4 LOAD EFF: 87.5	1/2 LOAD EFF: 86.5	GTD. EFF	ELEC. TYPE	NO LOAD AMPS
FULL LOAD PF: 90&89	3/4 LOAD PF: 84	1/2 LOAD PF: 74	85.5	SQ CAGE IND RUN	4.8 / 2.4

F.L. TORQUE	LOCKED ROTOR AMPS	L.R. TORQUE	B.D. TORQUE	F.L. RISE°C
7.6 LB-FT	76 / 38	17 LB-FT 224	22.5 LB-FT 296	55

SOUND PRESSURE @ 3 FT.	SOUND POWER	ROTOR WK^2	MAX. WK^2	SAFE STALL TIME	STARTS /HOUR	APPROX. MOTOR WGT
55 dBA	65 dBA	0.2 LB-FT^2	10 LB-FT^2	10 SEC.	2	75 LBS.

*** SUPPLEMENTAL INFORMATION ***

DE BRACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
STANDARD	STANDARD	RIGID	HORIZONTAL	FALSE	NONE	FALSE	NONE	BLUE (ENAMEL)

BEARINGS		GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	SHAFT	FRAME
DE	OPE					MATERIAL	MATERIAL
BALL	BALL	POLYREX EM	т	NONE	NONE	1045 HOT	ROLLED STEEL
6206	6203					ROLLED (C-204)	

THERMO-PROTECTORS				THERMISTORS	CONTROL	SPACE /n HEATERS
THERMOSTATS	PROTECTORS	WDG RTDs	BRG RTDs			
NONE	NOT	NONE	NONE	NONE	FALSE	NONE VOLTS


If Inverter equals NONE, contact factory for further information

INVERTER TORQUE: NONE INV. HP SPEED RANGE: NONE					
ENCODER: NONE					
NONE NONE					
NONE NONE PPR					
BRAKE: NONE	NONE				
NONE P/N NO	DNE				
NONE NONE					
NONE FT-LB	NONE V	NONE Hz			

DATE: 06/27/2017 01:26:36 AM FORM 3531 REV.3 02/07/99 ** Subject to change without notice.

* Ν 0 Т Е S *

Uncontrolled Copy

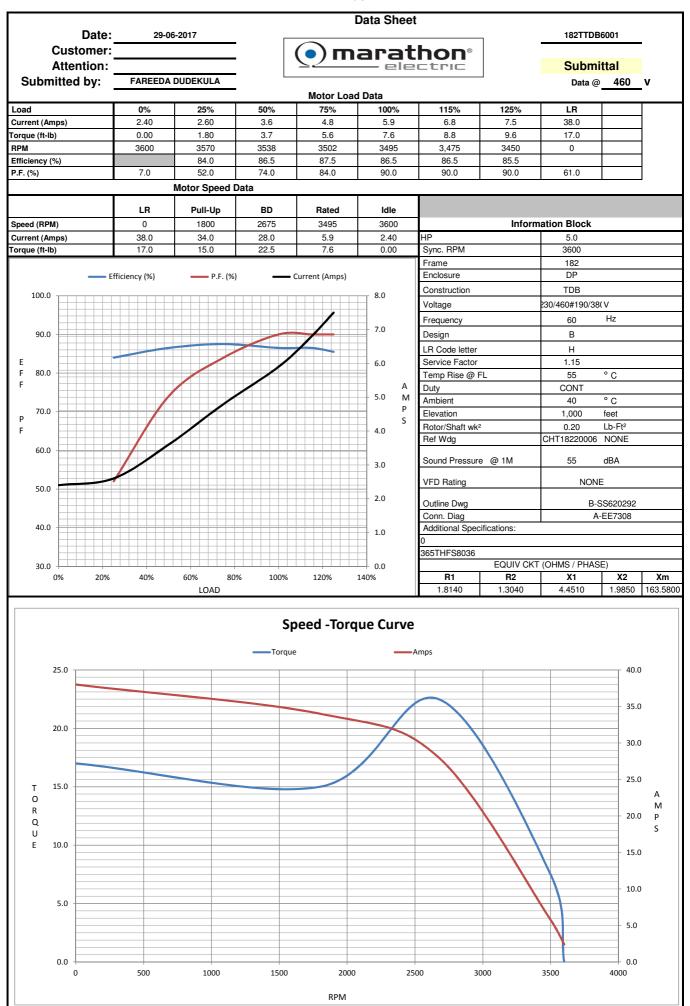



EC Declaration of Conformity

The undersigned representing the manufacturer:

Regal Beloit America 100 East Randolph St. Wausau, WI 54401 and the authorized representative established within the Community:

Marathon Electric UK 6F Thistleton Road Ind. Estate Market Overton Oakham, Rutland LE15 7PP UK

are committed to providing customers with products that comply with applicable regulations and international protocols to which they are subject, including the requirements of the European Parliament Directive on the Harmonization of the laws relating to electrical equipment designed for use within certain voltage limits (2014/35/EU).

Regal Beloit America declares that the following product(s), to which this declaration relates, are in conformity with the relevant sections of the EC standards listed below.

This statement supersedes any statements previously issued pertaining to the product(s) listed below and is subject to change without notice.

Model No: 182TTDB6001

(Model No. may contain prefix and/or suffix characters)

Catalog No : GT0012

Rework No : N/A

Directives :

Low Voltage Directive 2014/35/EU

Harmonized Standards Used :

EN 60034-1: 2010 (IEC 60034-1: 2010) EN 60034-5: 2001/A1:2007 (IEC 60034-5: 2000/A1:2006)

Authorized Representative:

Michael A Logsdon

Michael A. Logsdon Vice President, Technology

Created on 09/01/2022

(€ 22

Authorized Representative in the Community:

Julian Clark Marketing Engineer