PRODUCT INFORMATION PACKET

Model No: 184TTGCD36503 Catalog No: 184TTGCD36503 5/3,3600/3000,EPFC,184TD,3,60/50,230/460#190/380

Regal and Marathon are trademarks of Regal Rexnord Corporation or one of its affiliated companies. ©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E







1 of 4

Product Information Packet: Model No: 184TTGCD36503, Catalog No:184TTGCD36503 5/3,3600/3000,EPFC,184TD,3,60/50,230/460#190/380

marathon®


Nameplate Specifications


Phase	3	Output HP	5 Hp
Output KW	3.7 kW	Voltage	230/460 V
Speed	3510 rpm	Service Factor	1.15
Frame	184TD	Enclosure	Explosion Proof Fan cooled
Thermal Protection	Thermostat	Efficiency	88.5 %
Ambient Temperature	40 °C	Frequency	60 Hz
Current	12.0/6.0 A	Power Factor	88
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	J
Drive End Bearing Size	6206	Opp Drive End Bearing Size	6206
UL	UL Listed And CSA Certified	CSA	Y
CE	Ν	IP Code	54
Number of Speeds	1	Hazardous Location	EXP PROOF CL I GR C&D CL II GR F&G T3B

Technical Specifications

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Line Or Inverter
Poles	2	Rotation	Reversible
Resistance Main	3.55 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Cast Iron
Shaft Type	т	Shaft Diameter	1.125 in
Assembly/Box Mounting	F1 ONLY	Inverter Load	CONSTANT 10:1
Outline Drawing	035774-800	Connection Drawing	EE7308T

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:04/24/2023

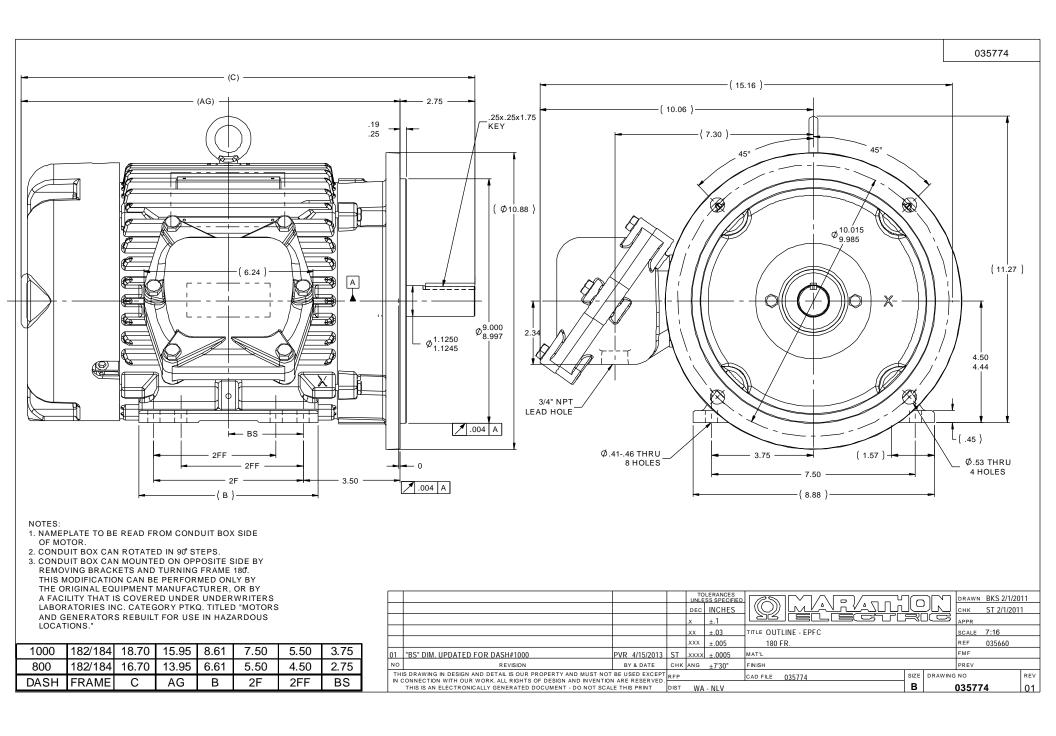

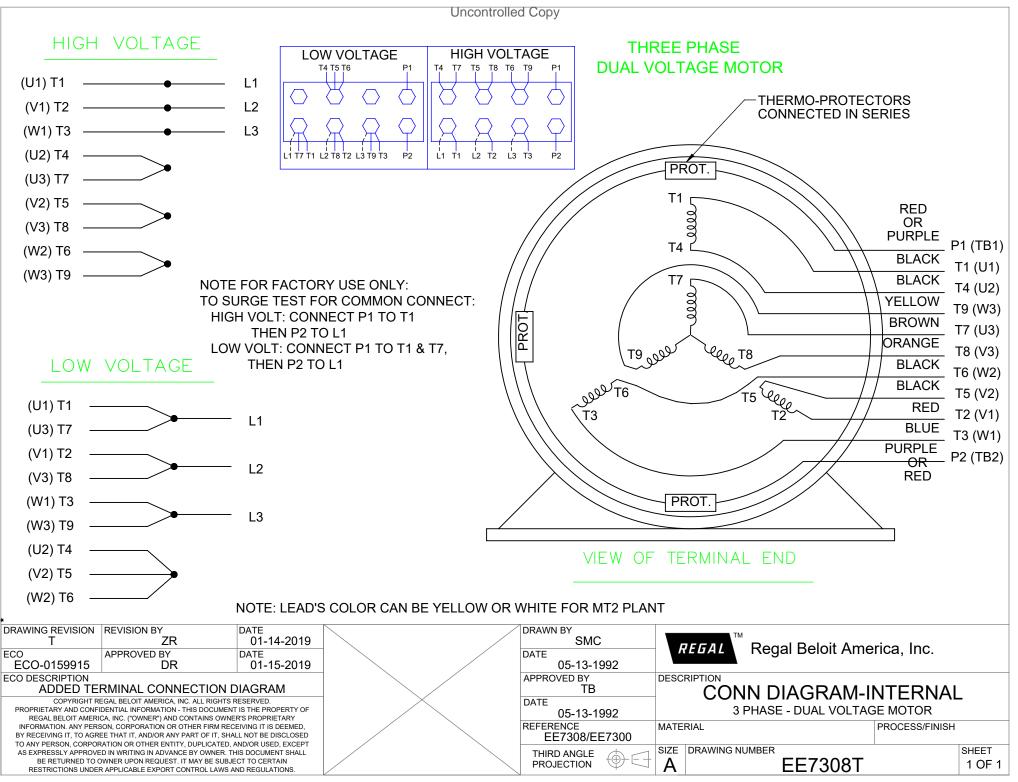

4 of 4