## **PRODUCT INFORMATION PACKET**



Model No: G150171.60 Catalog No: G150171.60 BSOLETE - REPLACED BY 170171.60 - 10HP..3520/2930RPM.213.DP.208-230/460V.3PH.60/50HZ.CONT.NOT.40C. 1.15/1.15SF.RIGID C.GENERAL PURPOSE.C213T34DK41C

Regal and Leeson are trademarks of Regal Rexnord Corporation or one of its affiliated companies.  $\hat{A}$ ©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E



## Product Information Packet: Model No: G150171.60, Catalog No:G150171.60 OBSOLETE - REPLACED BY 170171.60 - 10HP..3520/2930RPM.213.DP.208-230/460V.3PH.60/50HZ.CONT.NOT.40C.1.15/1.15SF.RIGID C.GENERAL PURPOSE.C213T34DK41C

## Nameplate Specifications


Phase	3	Output HP	10 & 7.50 Hp
Output KW	7.5 & 5.6 kW	Voltage	208-230/460 & 190/380 V
Speed	3520 & 2930 rpm	Service Factor	1.25 & 1.15
Frame	213TC	Enclosure	Drip Proof
Thermal Protection	No Protection	Efficiency	88.5 & 89.5 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	25.8-24/12 & 21.4/10.7 A	Power Factor	88
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	Н
Drive End Bearing Size	6308	Opp Drive End Bearing Size	6208
UL	Recognized	CSA	Y
CE	N	IP Code	22
Number of Speeds	1		

## **Technical Specifications**

Electrical Type	Squirrel Cage Induction Run	Starting Method	Across The Line
Poles	2	Rotation	Reversible
Resistance Main	.2984 Ohms	Mounting	Rigid C base
Motor Orientation	Nan	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Cast Iron
Shaft Type	т	Assembly/Box Mounting	NAN
Outline Drawing	16957260	Connection Drawing	005010.01

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/23/2023

LEESON

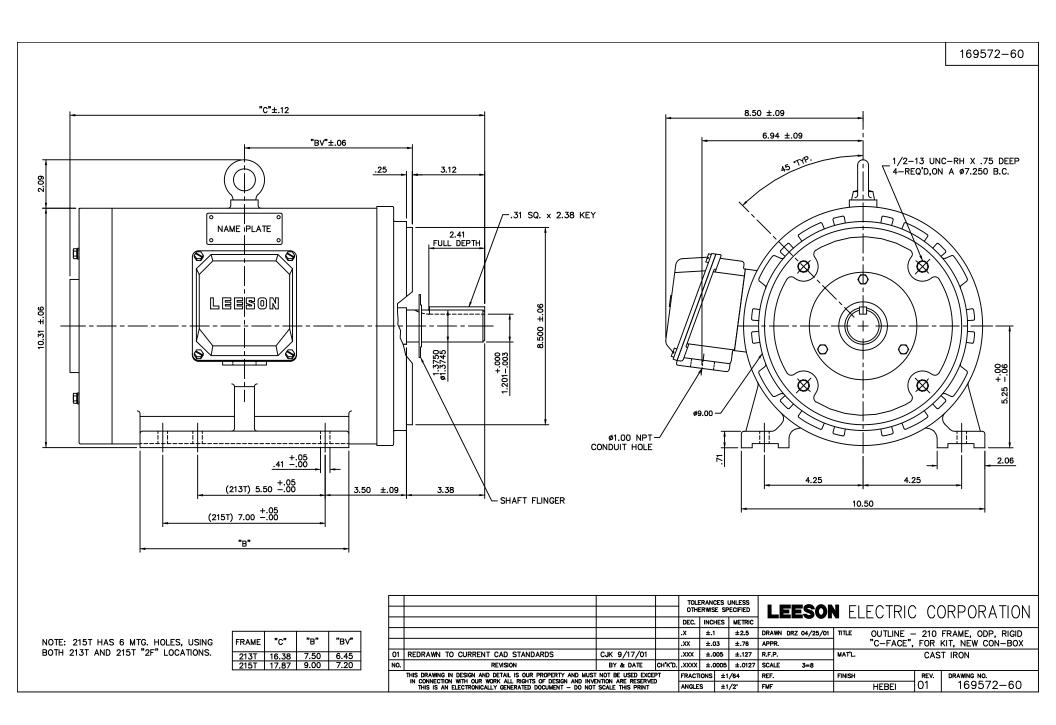

ERROR: syntaxerror OFFENDING COMMAND: --nostringval--

STACK:

/im -savelevelUncontrolled Copy

