PRODUCT INFORMATION PACKET



Model No: G150207.60 Catalog No: G150207.60 7.5HP..1760RPM.213.TEFC./575V.3PH.60HZ.CONT.NOT.40C.1.15SF.RIGID..C213T17FB46C

Miscellaneous






Nameplate Specifications

Output HP	7.50 Hp	Output KW	5.6 kW
Frequency	60 Hz	Voltage	575 V
Current	7.7 A	Speed	1760 rpm
Service Factor	1.15	Phase	3
Efficiency	89.5 %	Power Factor	82
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	Н
Frame	213T	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	No	Ambient Temperature	40 °C
Drive End Bearing Size	6308	Opp Drive End Bearing Size	6306
UL	Recognized	CSA	Υ
CE	Υ	IP Code	43
Number of Speeds	1		
Number of Speeds	1		

Technical Specifications

Electrical Type	Squirrel Cage Induction Run	Starting Method	Across The Line
Poles	4	Rotation	Reversible
Mounting	Rigid Base	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Cast Iron
Shaft Type	Т	Assembly/Box Mounting	VERIFY
Outline Drawing	16953560	Connection Drawing	005102.01

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:10/26/2021

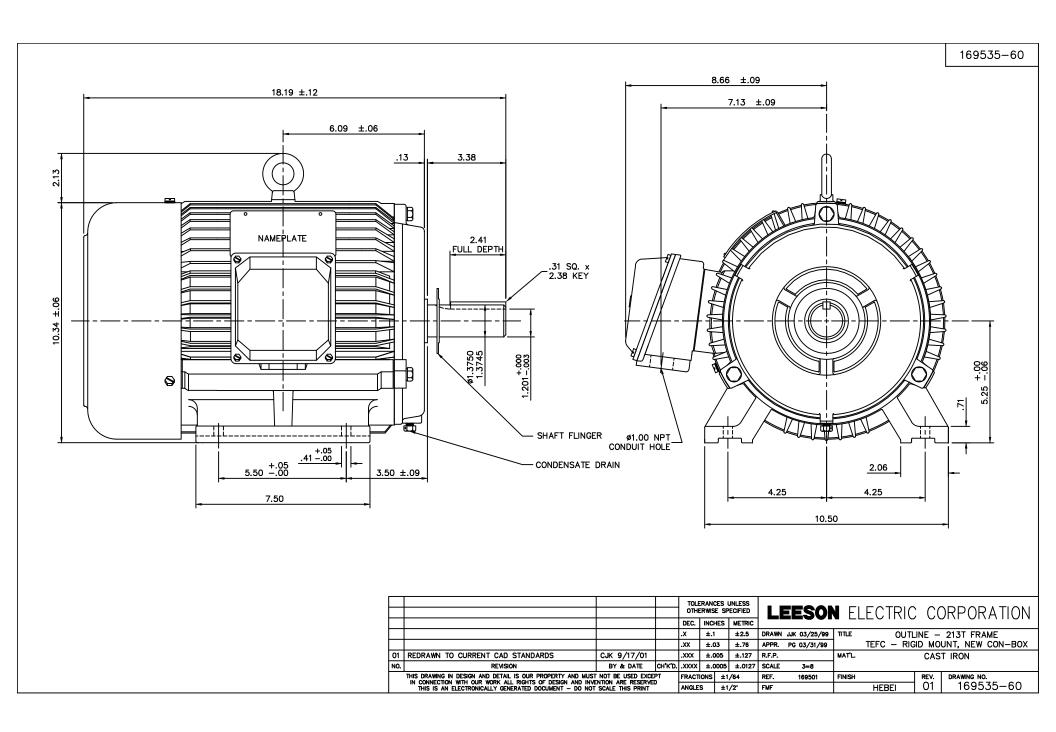

Uncontrolled Copy

